




Product Overview

- Thread type : Metric (M), PG, NPT
- Material : Brass with Nickel Plated (A, C, F)
- Claw : PA (E)
- Sealing and Sealing Ring : NBR (B, D)
- Approvals : CE, ROHS, REACH
- Protection Degree : IP68
- Temperature Resistance : -40°C to 100°C, Short time to 120°C
- Function : Extremely easy installation, simply insert cable through the assembled gland and tighten gland locknut until cable is secured. Resistant to salt water, alcohol, weak acid, grease oil and common solvent.

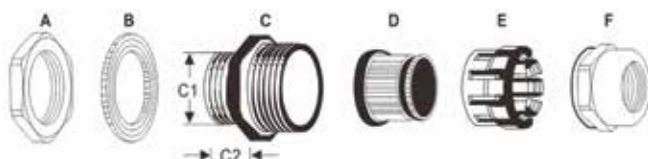

PG TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-PG7	3-7	12.5	6.0	14.0	100
TPE-PG9	4-8	15.2	7.0	17.0	100
TPE-PG11	6-10	18.6	7.0	20.0	100
TPE-PG13.5	8-12	20.4	8.0	22.0	100
TPE-PG16	10-14	22.5	8.0	24.0	100
TPE-PG19	10-14	23.8	8.0	24.0/27.0	100
TPE-PG21	13-18	28.3	9.0	30.0	50
TPE-PG25	15-22	30.0	9.0	34.0	50
TPE-PG29	18-25	37.0	9.0	40.0	20
TPE-PG36	25-32	47.0	10.0	50.0	10
TPE-PG42	32-38	54.0	10.0	57.0	10
TPE-PG48	37-44	59.3	11.0	64.0	5
TPE-PG63	42-52	70.8	15.0	78.0	5

M TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-M8x1.0(1.25)	3-7	8.0	5.0	12.0	100
TPE-M10x1.0	3-7	10.0	6.5	14.0	100
TPE-M12x1.5	3-7	12.0	8.0	14.0	100
TPE-M16x1.5	4-8	16.0	8.0	17.0	100
TPE-M20x1.5	8-12	20.0	8.0	22.0	100
TPE-M25x1.5	10-14	25.0	9.0	30.0	50
TPE-M32x1.5	15-22	32.0	10.0	40.0	20
TPE-M40x1.5	22-28	40.0	11.0	50.0	20
TPE-M50x1.5	32-38	50.0	13.0	57.0	10
TPE-M63x1.5	37-44	63.0	14.0	64.0	5
TPE-M72x2.0	42-52	72.0	16.0	78.0	5
TPE-M75x2.0	42-52	75.0	16.0	80.0	5
TPE-M80x2.0	50-62	80.0	18.0	88.0	5
TPE-M88x2.0	60-70	88.0	18.0	94.0	5
TPE-M100x2.0	70-80	100.0	20.0	110.0	5

NPT TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-NPT3/8"	4-8	17.0	8.0	18.0	100
TPE-NPT1/2"	8-12	21.2	8.0	22.0	100
TPE-NPT3/4"	13-18	26.5	9.0	30.0	50
TPE-NPT1"	15-22	33.2	11.0	40.0	20
TPE-NPT1-1/4"	22-28	41.9	13.0	50.0	10
TPE-NPT1-1/2"	25-32	48.0	14.0	57.0	10
TPE-NPT2"	37-44	60.0	14.0	65.0	5
TPE-NPT2-1/2"	42-52	72.6	15.0	77.0	5
TPE-NPT3"	65-70	87.8	15.0	94.0	5

บริษัทฯ ขอสงวนสิทธิ์การเปลี่ยนแปลงราคา โดยมีต้นทุนให้ทราบล่วงหน้า

ส่วนติดต่อค้าขาย Tel 02-027-7841, 095-543-5665 / Fax 02-026-6529

Email : sales.tpetrading@gmail.com / ID Line : @tpetrading