




## Product Overview

- Material : Stainless Steel 304/316 / Claw : PA / Sealing : NBR
- Approvals : CE, RoHS, REACH
- Protection Degree : IP68
- Temperature Resistance : -40°C to 100°C, Short time to 120°C
- Thread Length : Standard thread type is used for the equipment which has inner thread. or for the thin board, Long thread type is used for the think board.
- Function : Extremely easy installation, simply insert cable through the assembled gland and tighten gland, lock nut until cable is secured.
- This cable glands are designed to withstand water, dust, salt, acid-base, alcohol, oil, and common solvent.
- Usage : Waterproof brass cable gland is the product of form a complete set of the cable, connector.
- Cable can be lock, the other end can access devices on box body
- Also can choose thread according to the import and export for internal thread electric devices.
- Notes : Customization is available.

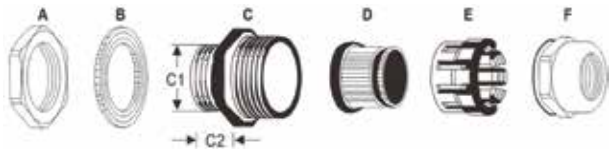

### PG TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-PG7-SS	3-6.5	12.5	6.0	14.0	100
TPE-PG9-SS	4-8	15.2	7.0	17.0	100
TPE-PG11-SS	5-10	18.6	7.0	20.0	100
TPE-PG13.5-SS	6-12	20.4	8.0	22.0	100
TPE-PG16-SS	10-14	22.5	8.0	24.0	100
TPE-PG21-SS	13-18	28.3	9.0	30.0	50
TPE-PG29-SS	18-25	37.0	9.0	40.0	20
TPE-PG36-SS	25-33	47.0	10.0	50.0	10
TPE-PG42-SS	32-38	54.0	10.0	57.0	10
TPE-PG48-SS	37-44	59.3	11.0	64.0	5
TPE-PG63-SS	42-52	70.8	15.0	78.0	5

### M TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-M8x1.0-SS	2-5	8.0	5.0	12.0	100
TPE-M10x1.0-SS	3-6.5	10.0	6.5	14.0	100
TPE-M12x1.5-SS	4-8	12.0	8.0	14.0	100
TPE-M16x1.5-SS	5-10	16.0	8.0	17.0	100
TPE-M20x1.5-SS	6-12	20.0	8.0	22.0	100
TPE-M25x1.5-SS	13-18	25.0	9.0	30.0	50
TPE-M32x1.5-SS	15-22	32.0	10.0	40.0	20
TPE-M40x1.5-SS	22-30	40.0	11.0	50.0	20
TPE-M50x1.5-SS	32-38	50.0	13.0	57.0	10
TPE-M63x1.5-SS	37-44	63.0	14.0	64.0	5
TPE-M72x2.0-SS	42-52	72.0	16.0	78.0	5
TPE-M75x2.0-SS	42-52	75.0	16.0	80.0	5
TPE-M80x2.0-SS	55-60	80.0	18.0	88.0	5
TPE-M88x2.0-SS	65-70	88.0	18.0	94.0	5
TPE-M100x2.0-SS	75-84	100.0	20.0	110.0	5

### NPT TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-NPT3/8"-SS	4-8	17.0	8.0	18.0	100
TPE-NPT1/2"-SS	6-12	21.2	8.0	22.0	100
TPE-NPT3/4"-SS	13-18	26.5	9.0	30.0	50
TPE-NPT1"-SS	18-25	33.2	11.0	40.0	20
TPE-NPT1-1/4"-SS	25-33	41.9	13.0	50.0	10
TPE-NPT1-1/2"-SS	32-38	48.0	14.0	57.0	10
TPE-NPT2"-SS	37-44	60.0	14.0	65.0	5
TPE-NPT2-1/2"-SS	42-52	72.6	15.0	77.0	5
TPE-NPT3"-SS	65-70	87.8	15.0	94.0	5

\*\*บริษัทฯ ขอสงวนสิทธิ์การเปลี่ยนแปลงราคา โดยมีต้นฉบับแจ้งให้ทราบล่วงหน้า\*\*

ตัวแทนโปรดติดต่อฝ่ายขาย Tel 02-027-7841, 095-543-5665 / Fax 02-026-6529

Email : sales.tpetrading@gmail.com / ID Line : @tpetrading